

**114-600-3800** is a Low-PIM 4-Way Reactive Power Splitter, designed to evenly split high power signals between 600MHz and 3800MHz. Because of their rugged construction, they are indestructible and can be used in extreme weather and environmental conditions. It also has a very low Insertion Loss with an outstanding VSWR at all three ports. Available with different connector options.

### FEATURES:


- Wide bandwidth 600 MHz – 3800 MHz
- Covers CBRS Band
- Low Insertion Loss and low VSWR
- Low PIM, -161dBc
- RoHS Complaint
- Weatherproof / Outdoor unit
- In Stock to low lead time delivery
- Superior Construction and High Power Handling
- Available in DIN, Mini-DIN, 4.3-10 or Nex10 Connectors



### SPECIFICATIONS:

Frequency Range:	600 MHz – 3800 MHz
Passband Insertion Loss:	0.75 dB (Over the theoretical loss of 6 dB)
VSWR:	$\leq 1.25$
Power Handling:	300 W (Avg)
Impedance:	50 $\Omega$
PIM – 3 <sup>rd</sup> :	-161 dBc (2 Tones +43 dBm)
Temperature Range:	-30°C to 75°C
Weight:	1.00 lb
Housing Finish:	Aluminum Body
Mounting Method:	Mounting Holes
Humidity:	5% - 95%
Environment:	IP67


### Block Diagram for 114-600-3800

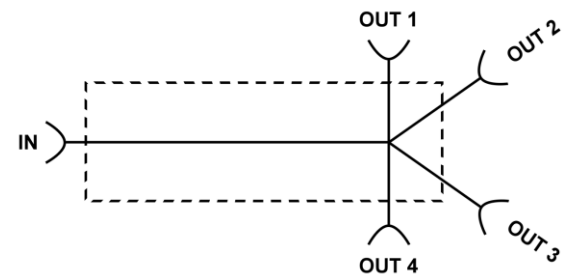

### ORDERING INFO:

114-600-3800-D	--- 7/16 DIN Connector
114-600-3800-MD	--- Mini-DIN Connector
114-600-3800-D43	--- 4.3-10 Connector
114-600-3800-X10	--- Nex10 Connector

### Dimensions for 114-600-3800

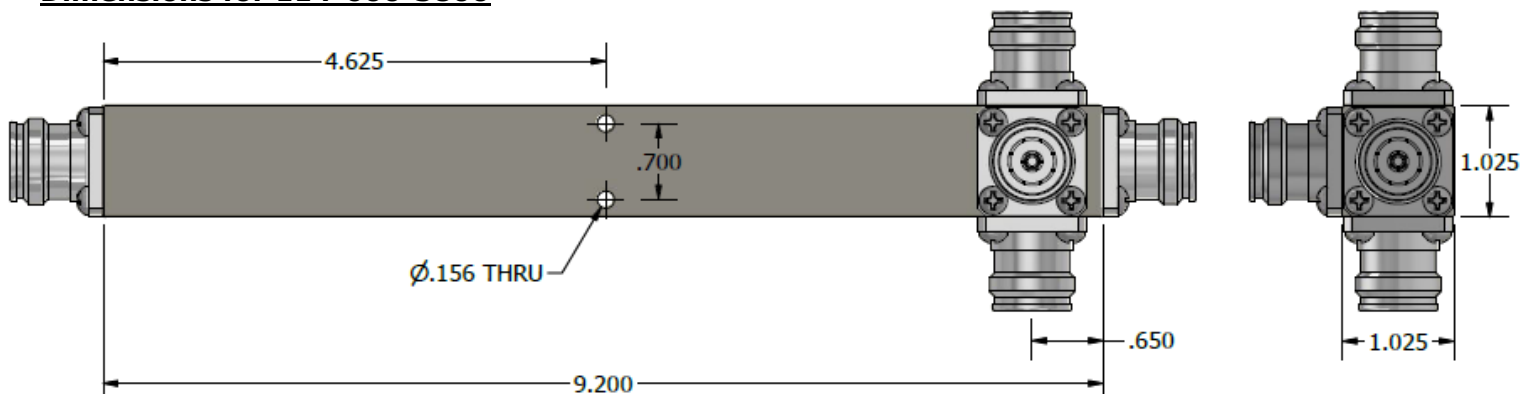

Please contact our sales department at 737-200-7090 or [sales@InnowaveRF.com](mailto:sales@InnowaveRF.com) for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.