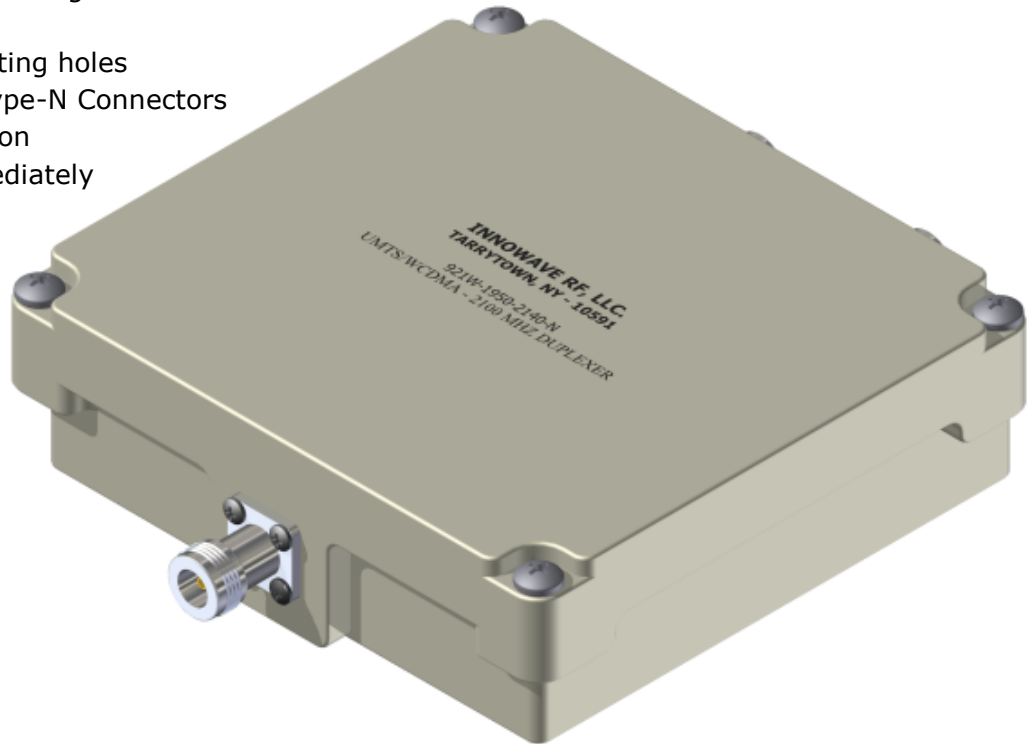



FEATURES:

- Splits or combines TX and RX in UMTS/WCDMA signals in the 2100MHz band
- Best-in-class Isolation between the 2 signals
- Very low Insertion Loss with superior out of band rejections
- Low-PIM with High Power Handling
- ROHS Compliant
- Ease of Mounting with mounting holes
- Available in 7/16 DIN and Type-N Connectors
- Weatherproof / Outdoor option
- In Stock and Available Immediately

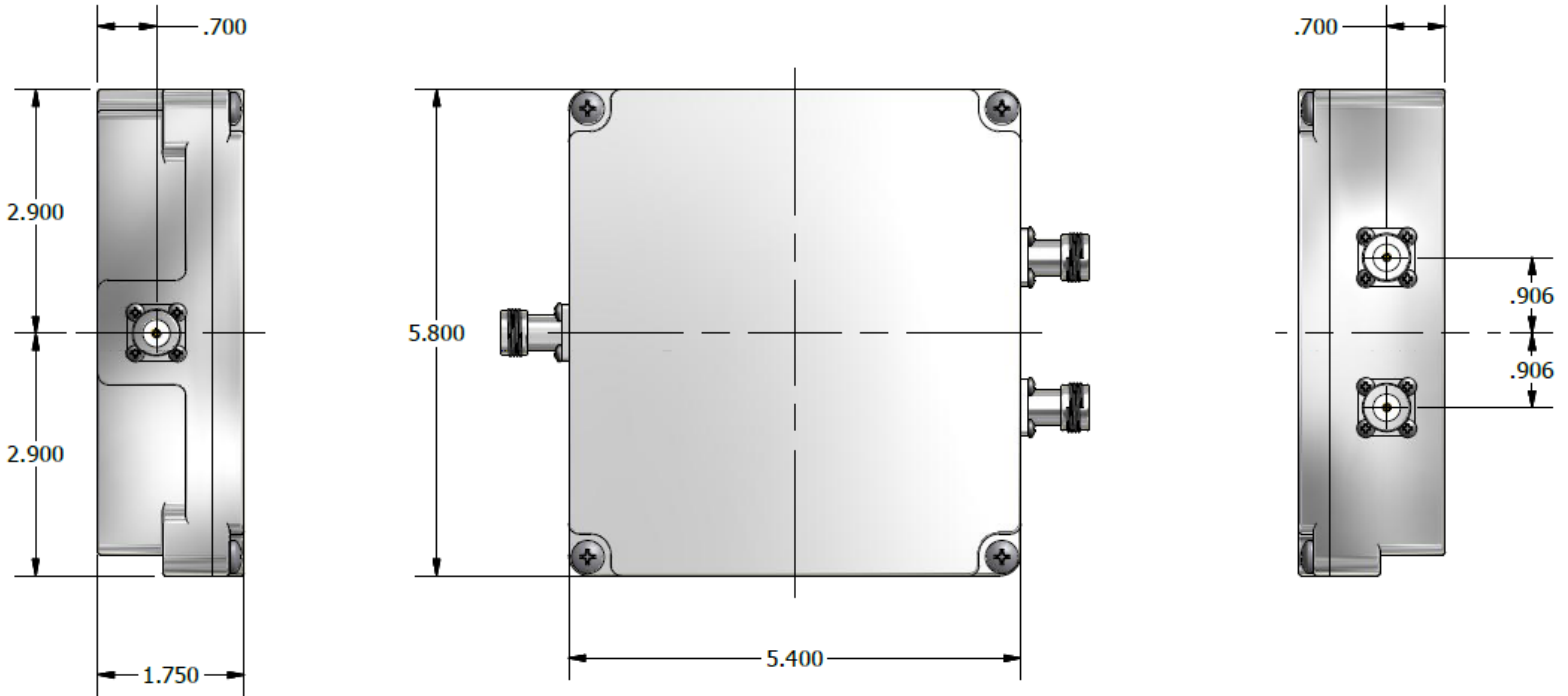

ELECTRICAL SPECIFICATIONS:

Frequency Bands	Receive	Transmit
	1920MHz-1980MHz	2110MHz-2170MHz
Insertion Loss	0.35 dB (Typ)	
Pass Band Ripple	0.15 dB (Typ)	
Isolation	≥80 dB @ 2110MHz-2170MHz	≥80 dB @ 1920MHz-1980MHz
Return Loss	22 dB (Typ)	
Impedance	50 Ohms	
Input Power	250 Watts (Avg)	
Intermodulation (PIM - 3 rd) ***	-150dBc (Typ) / -157dBc (Typ) (2 Tones +43 dBm)	

MECHANICAL SPECIFICATIONS:

Connectors:	Type-N (Female) and 7/16 DIN (Female) Options Available
Housing Finish:	Aluminum Body
Mounting Method:	Mounting Holes
Temperature Range:	-30°C to 80°C
Humidity:	5% – 95%
Environment:	IP67

Dimensions for 921W-1950-2140-N



Center of Gravity for 921W-1950-2140-N

