



**211-380-2700-20** is a broadband 20 dB Power Directional Coupler operating from 380 MHz – 2700 MHz. It has low PIM, excellent directivity and coupling flatness across the entire band. It also exhibits a very low insertion loss along with outstanding VSWR at all three ports. Type-N and 7/16 DIN Connector options available.

**FEATURES:**

- Wide bandwidth, 380 MHz – 2700 MHz
- High Power Handling and High Isolation
- Excellent PIM, -157 dBc typical
- Low VSWR and Low Insertion Loss
- RoHS Compliant.
- Outdoor/Weather Resistant unit.
- In Stock and Available Immediately

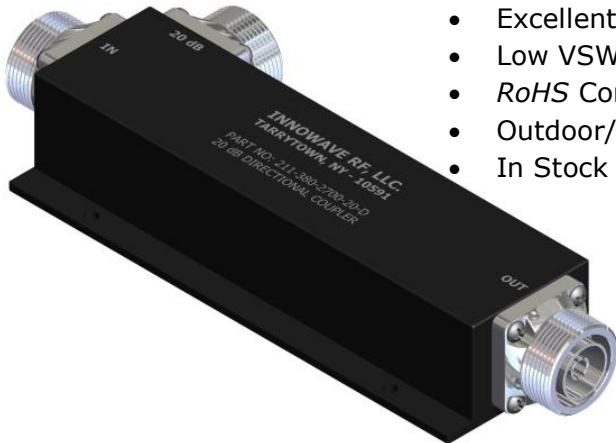

Coupled Power

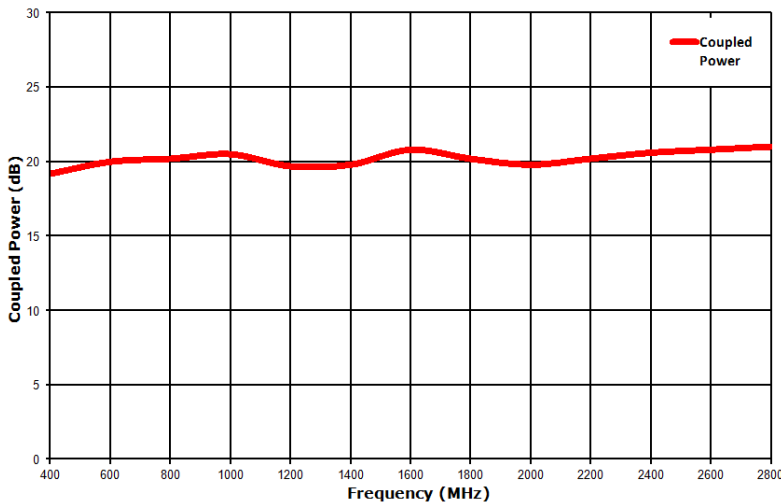


**SPECIFICATIONS:**

Frequency Range:	380 MHz – 2700 MHz
Insertion Loss:	0.25 dB (Typ)
Isolation:	45.00 dB (Typ)
VSWR:	1.25 (Typ)
Power Handling:	500 W (Avg)
Coupling Accuracy:	±0.80 dB (Typ)
PIM – 3 <sup>rd</sup> :	-157 dBc (Typ) (2Tone 43dBm each)
Temperature Range:	-55°C to 85°C
Humidity:	Up to 100%
Environment:	IP65 – Outdoor Use


**APPLICATIONS:**

- DAS
- Wi-Fi / WiMAX
- Cellular and GPS
- Communication Transmitter and Receiver
- Public Safety and ISM
- Instrumentation


Insertion Loss & VSWR

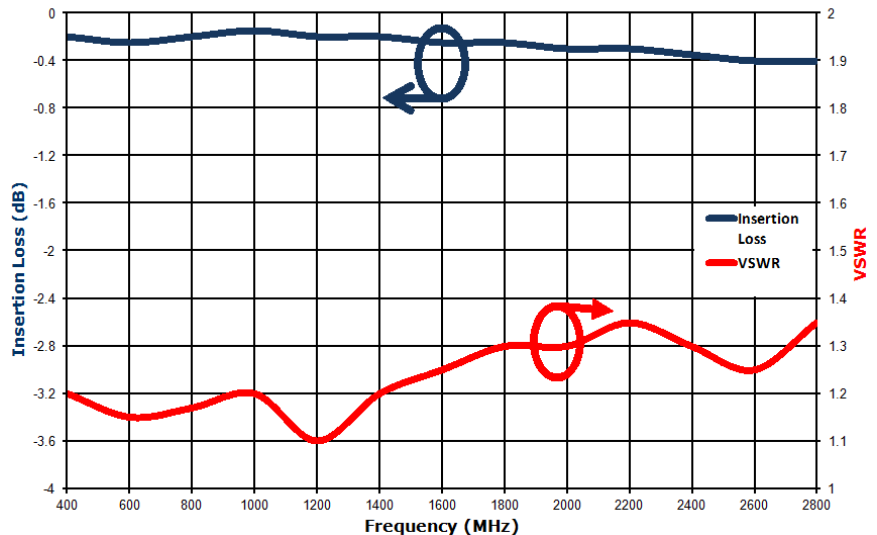

**Dimensions for 211-380-2700-20-N**

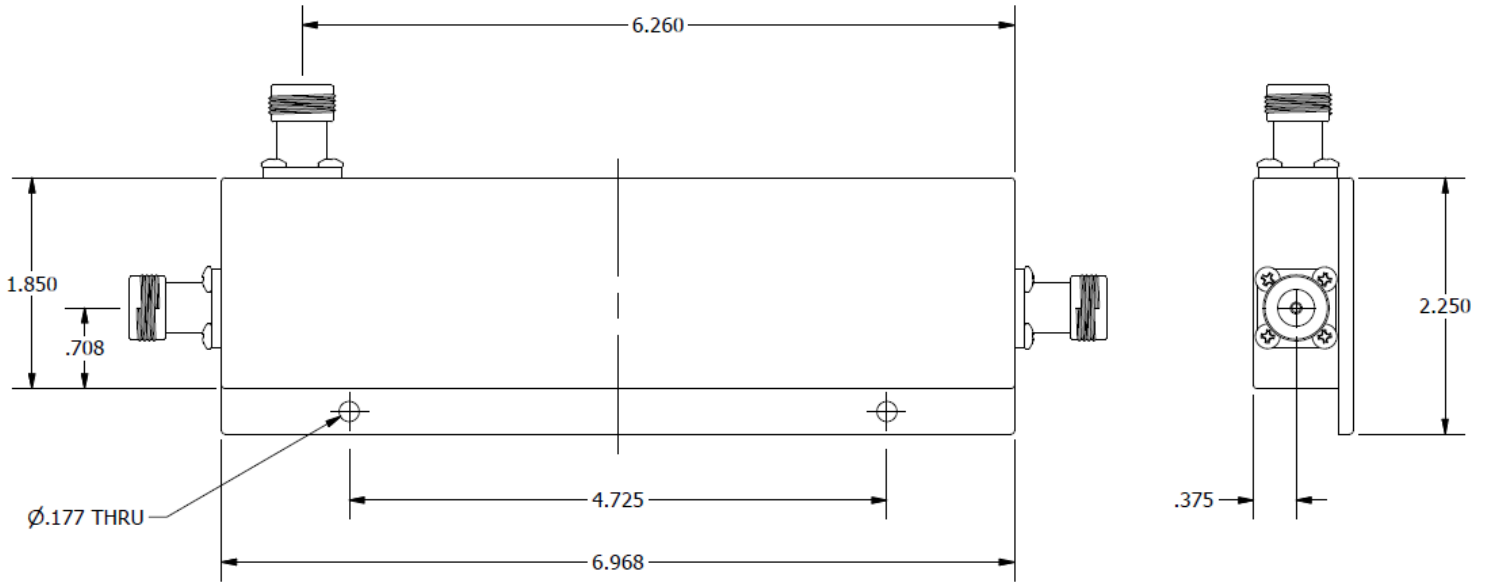

**Dimensions for 211-380-2700-20-D**

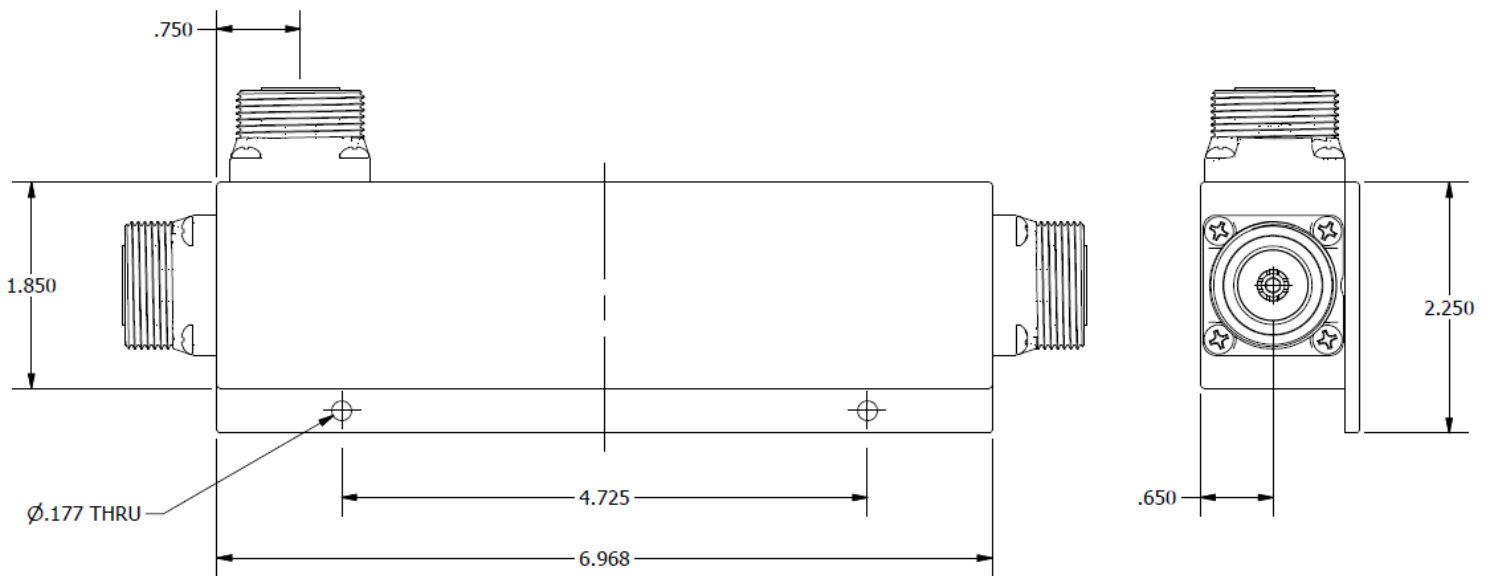

Please contact our sales department at 914-230-4060 or [sales@InnowaveRF.com](mailto:sales@InnowaveRF.com) for any custom requirements.  
 © Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.