


FEATURES:

- Hybrid Module to **splits or combines any four In-Band frequency bands** for DRAN systems
- Covers all bands between **698MHz – 2700MHz**
- Ideal for Low-Power and Mid-Power Radios
- 30dB Isolation
- Low-PIM and Low Insertion Loss
- Interchangeable Modules for easy upgrades and Troubleshooting
- *RoHS* Complaint
- Rugged, Weatherproof IP67 unit



ELECTRICAL SPECIFICATIONS:

| | |
|--|---|
| Frequency Range | 698MHz – 2700MHz (700LTE, 850GSM, 850CDMA, PCS, AWS-1, AWS-3, WCS, BRS) |
| Passband Insertion Loss | 6.00 dB ± 0.80dB |
| Isolation | 30 dB |
| VSWR | 1.20 |
| Impedance | 50 Ohms |
| Input Power | 500 Watts/Port (Avg) |
| Intermodulation (PIM - 3 rd) | -163 dBc (2 Tones +43 dBm) |
| Connectors | 4.3-10 / Nex10 |
| DC Path | IN PORT1 → OUT PORT4 |
| | IN PORT2 → OUT PORT2 |
| | IN PORT3 → OUT PORT3 |
| | IN PORT4 → OUT PORT1 |
| Temperature Range | -20°C to 7560°C |
| Environment | IP67 (Outdoor) |
| Relative Humidity | 100% |
| Weight | 7.50 lbs |
| Dimensions | 13.200" x 6.750" x 2.500" |

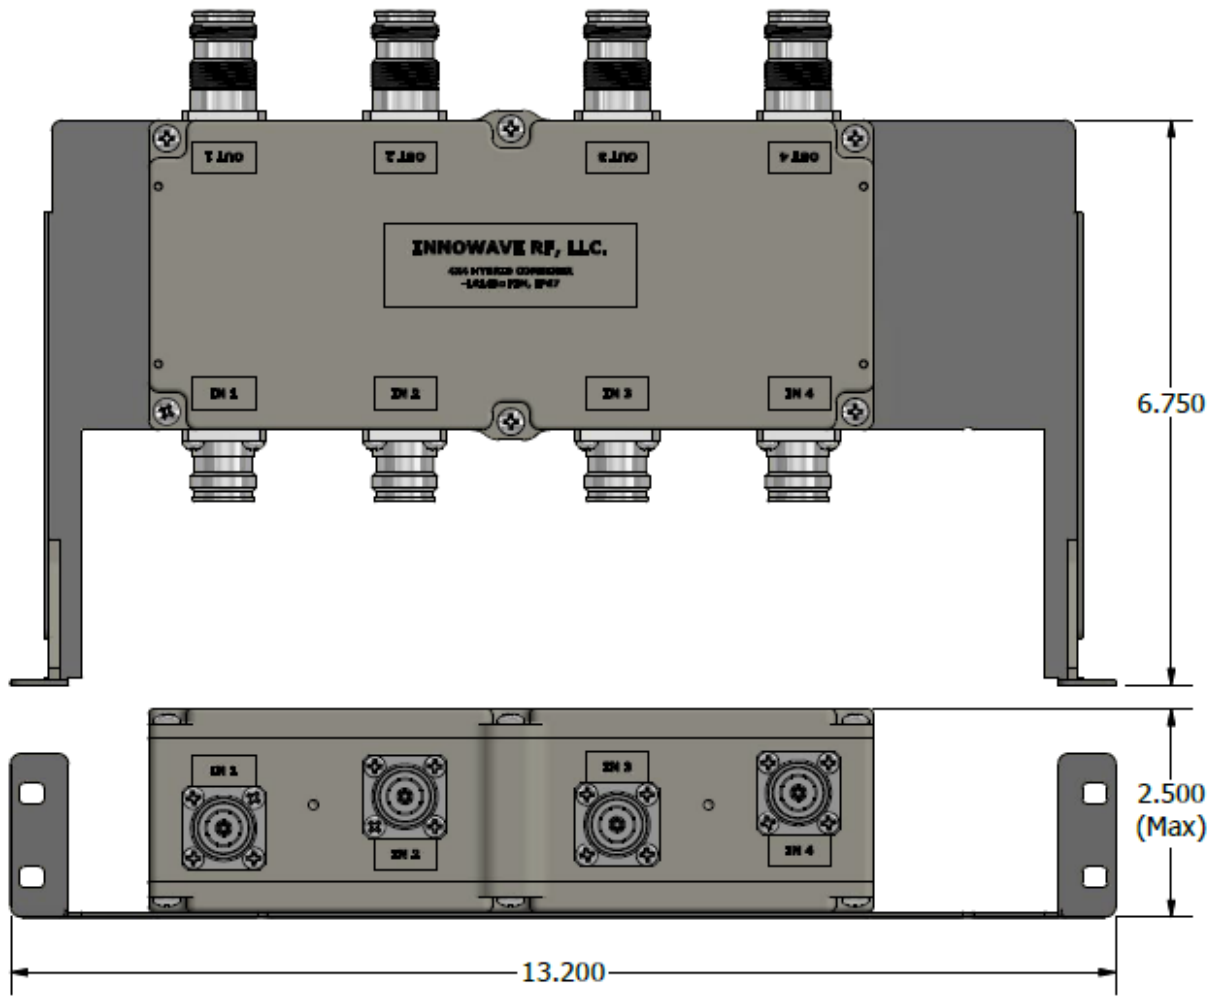

Please contact our sales department at 737-200-7090 or sales@InnowaveRF.com for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.