

Innovation in Every Wave

226-600-2700 is a 6-Port, 4.8dB Hybrid Coupler that can be used to combine any 2 signals in 600MHz - 2700MHz range. The combined signal will appear at all the output ports. These are symmetric devices so inputs and outputs can be used interchangeably. It can also be used to split one input signal into 3 output ports. The unused port must be always terminated with a 50Ω Load. These hybrid couplers can be used over a wide range of temperature and environmental conditions.

FEATURES:

- Combines 3 signals in the 600MHz - 2700MHz
- Covers 600MHz (Band 71)
- Best-in-class Isolation between the 3 ports
- Very low Insertion Loss
- Available in DIN, Mini-DIN, 4.3-10 or Nex10 Connectors
- Low-PIM & High Power Handling
- Ease of Mounting with mounting holes
- Weatherproof for Outdoor use
- In Stock and Available Immediately




ELECTRICAL SPECIFICATIONS:

| | |
|---|--|
| Frequency Range: | 600MHz – 2700MHz |
| Coupling Loss: | 4.80±0.75dB @ 600-960 5.00±1.00dB @ 1695-2700 |
| Isolation: | 25.00 dB |
| VSWR: | 1.22 |
| Impedance: | 50 Ohms |
| Input Power: | 200 Watts (Avg) |
| Intermodulation (PIM – 3 rd): | -161dBc (2 Tones +43dBm) |

MECHANICAL SPECIFICATIONS:

| | |
|--------------------|---|
| Connectors: | DIN (D) / Mini-DIN (MD) / 4.3-10 (D43) / Nex10 (X10) |
| Housing Finish: | Aluminum Body |
| Mounting Method: | Mounting Holes |
| Temperature Range: | -30°C to 65°C |
| Weight: | 2.30 lbs |
| Humidity: | 5% - 95% |
| Environment: | IP67 |

Dimensions for 226-600-2700-D43

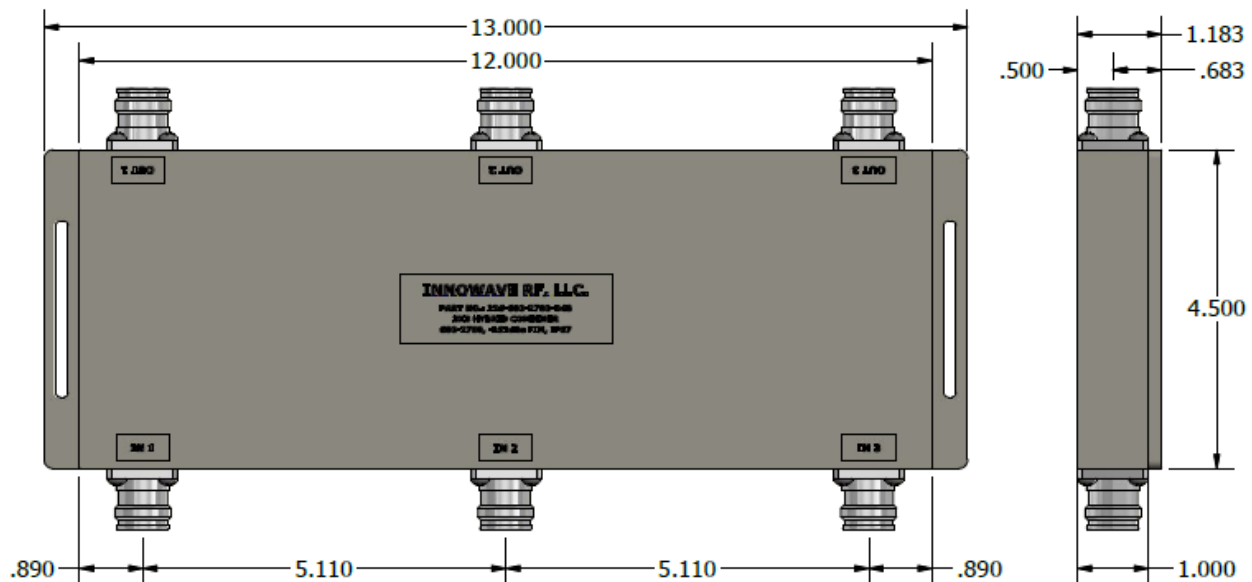

Please contact our sales department at 737-200-7090 or sales@InnowaveRF.com for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.