
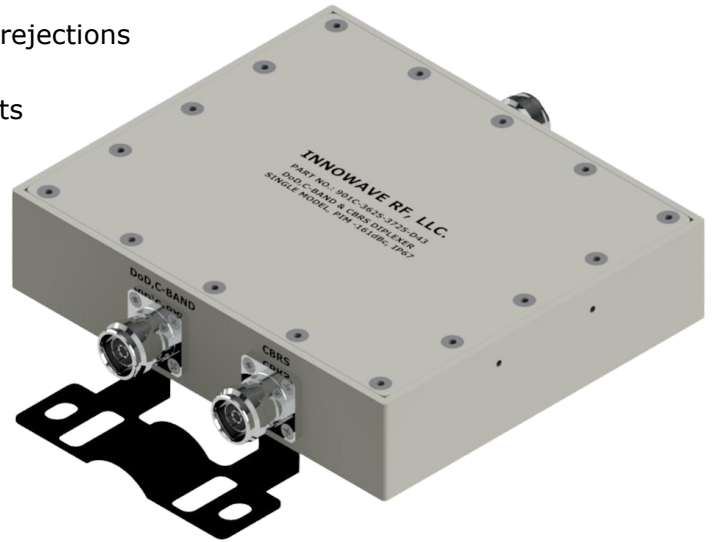


**FEATURES:**

- Splits or combines all the **CBRS Band** (3550MHz-3700MHz) and **DoD, C-Band** (3450MHz-3530MHz, 3720MHz-4200MHz)
- Available in **Dual / Stacked Model (902C Series), Twin Model (903C Series) & Quad Model (904C Series)**
- Minimum 40dB Isolation between the bands
- Very low Insertion Loss with superior out of band rejections
- Available in 4.3-10 or NEX10 Connectors
- Ease of Mounting with mounting holes and brackets
- Low-PIM with High Power Handling
- *RoHS* Compliant
- Weatherproof for Outdoor installation
- In Stock and Available Immediately



**ELECTRICAL SPECIFICATIONS:**

Frequency Bands	<b>CBRS Band</b> 3550 MHz - 3700 MHz	<b>DoD, C-Band</b> 3450 MHz - 3530 MHz 3720 MHz - 4200 MHz
Passband Insertion Loss	0.40 dB	
Isolation	≥ 40 dB	
Return Loss	20 dB	
Impedance	50 Ohms	
Input Power / Port	150 Watts (Avg)	
Intermodulation (PIM - 3 <sup>rd</sup> )	-161 dBc (2 Tones +43 dBm)	
Lightning Protection	8/20S 10kA Pulse (IEC 801-5)	
MTBF Hours	≥ 500,000	

**MECHANICAL SPECIFICATIONS:**

Connectors:	4.3-10 (D43) / NEX10 (X10)
Housing Finish:	Aluminum Body
Mounting Method:	Mounting Bracket
Temperature Range:	-30°C to 75°C
Humidity:	5% – 95%
Weight:	6.50 lbs
Environment:	IP67


**ORDERING INFO:**

**Single Model:**

4.3-10 Connector:	Part#: 901C-3625-3725-D43
NEX10 Connector:	Part#: 901C-3625-3725-X10

**STACKED/TWIN/QUAD MODEL  
AVAILABLE**

**Dimensions for 901C-3625-3725-D43**

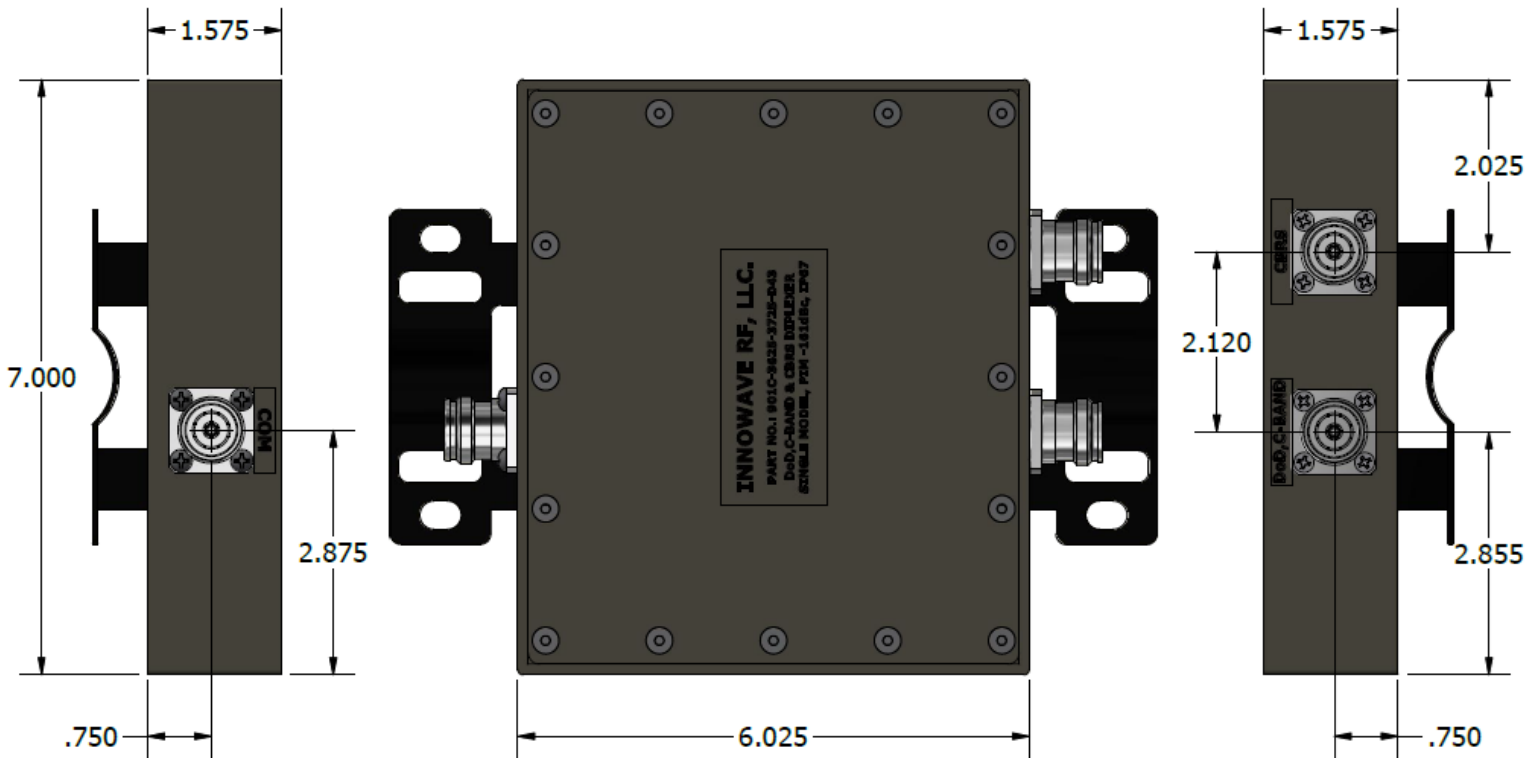

**SINGLE/TWIN/QUAD MODELS AVAILABLE**

Please contact our sales department at 737-200-7090 or [sales@InnowaveRF.com](mailto:sales@InnowaveRF.com) for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.