

757W-600-6000 is Low PIM-Rated, Ultra-Slim Wideband Hanger-Mount Antenna designed to support all cellular and public safety bands from 617 MHz to 6000 MHz. It supports all cellular standards with high efficiency in all the bands, thus enabling a uniform coverage for all the applications with one antenna. These antennas are perfect for facilities such as warehouse, parking lot and high ceiling installations as such as building lobbies. This antenna features support piece for 3/8" and 1/2" hanger rods for a simple and stable installation. This Low-Profile Antenna is designed to blend in with the environment and is perfect for In-Building and Public Safety Applications.

FEATURES:

- Superior Performance across all bands from 617MHz to 6000MHz
- Covers Public Safety, Cellular, C-Band, CBRS & LTE-LAA bands
- Light Weight, Ultra-Slim Antenna
- Easy Mounting
- High Gain, Low VSWR
- Low PIM performance
- Corrosion resistant and Anti-aging material
- RoHS Compliant
- In Stock to low lead time delivery



ELECTRICAL SPECIFICATIONS:

Frequency Bands	617-698	698-806	806-960	1695-2200	2200-2700	3300-4200	4900-6000
Gain	3.5 dBi	3.8 dBi	4.0 dBi	5.0 dBi	6.0 dBi	5.5 dBi	7.0 dBi
VSWR	≤ 1.8	≤ 1.75	≤ 1.70	≤ 1.55	≤ 1.55	≤ 1.80	≤ 1.70
Polarization	Linear Horizontal						
Horizontal Beamwidth	360°						
Vertical Beamwidth	120°	116°	100°	78°	70°	65°	30°
Input Impedance	50 Ohms						
Max Power	50 Watts						
Lightning Protection	DC Ground						
Intermodulation (PIM - 3 rd)	-155 dBc (Typ) (2 Tones +43 dBm)						

MECHANICAL SPECIFICATIONS:

Connectors	4.3-10(F) (Standard) / Type-N(F) (Male Connector Available on Request)
Environmental Class	Indoor
RF Jumper	6ft. (White Jacket)
Mounting	Hanger-Mount (Ceiling Mount Available)
Dimension	Ø7.500" x 0.300"
Weight	0.50 lb
Reflector Material	RF-PCB
Radome Material	ABS (UV Stabilized)
Radome Color	White (Standard)
Operating Temperature	-40°C to +65°C


ORDERING INFO:

4.3-10(F) Conn: 757W-600-6000-D43
Type-N(F) Conn: 757W-600-6000-N


FOR CEILING MOUNT ANTENNA:

Use 757-600-6000 Series Antenna

Dimensions for 757W-600-6000-D43

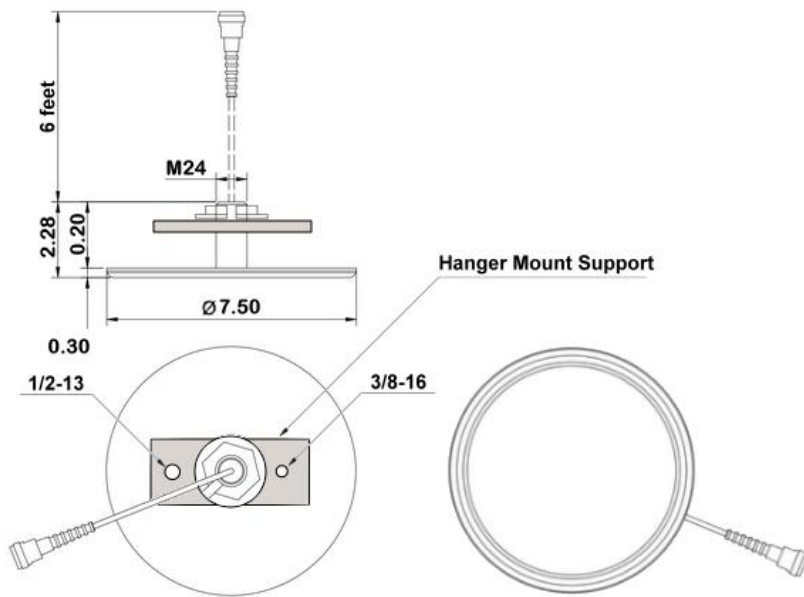


Assembly Rendering for 757W-600-6000

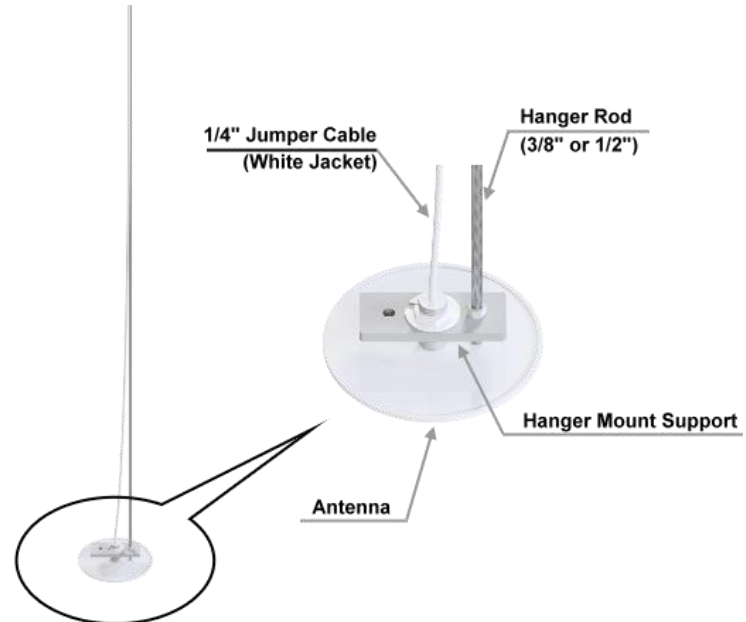


Radiation Patterns

Horizontal

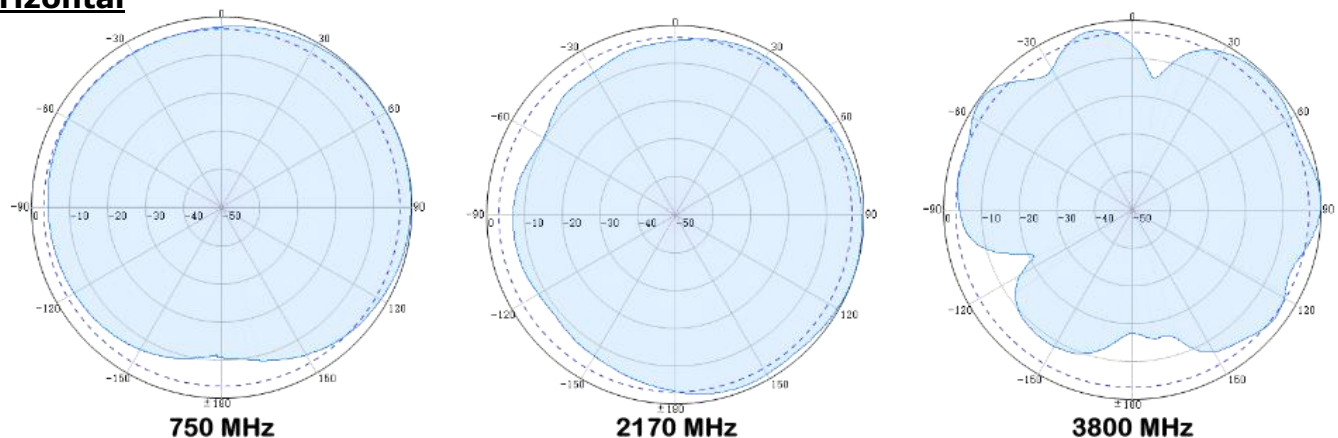

Vertical

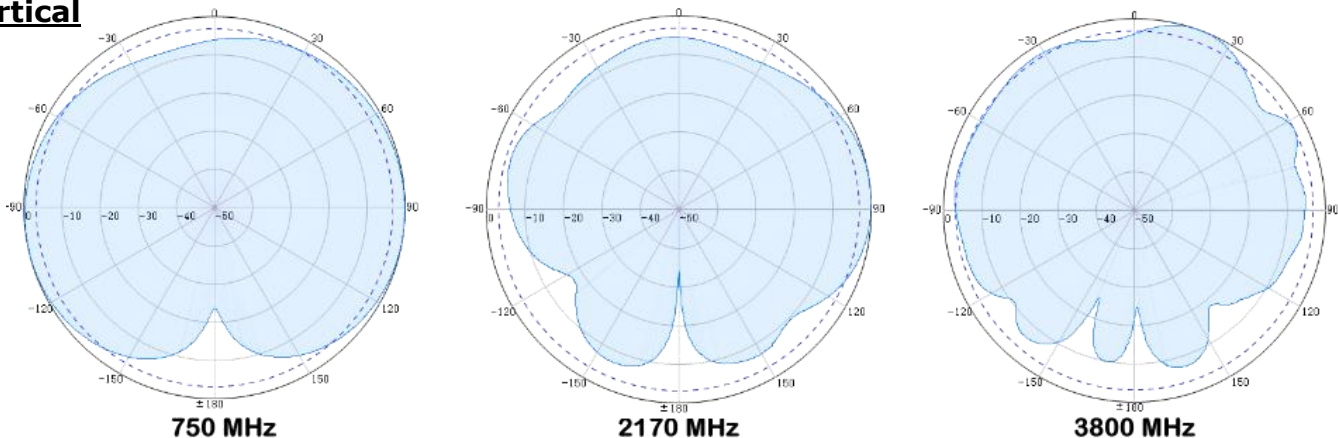

Please contact our sales department at 737-200-7090 or sales@InnowaveRF.com for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.