


ASSM-112BR-12-D43 is an array of 2-Way In-Line Power Splitters mounted on a 2RU Sub-Rack Tray. 12x of the Reactive Power Splitters (Model #: 112B-600-6000-D43) can be mounted on a rack tray. Each of these splitters has an independent RF path. The Splitters' Input and Output connectors are In-Line, which makes connection on a Rack Frame or H-Frame simple and straightforward with split ends in the front and the Common at the back of the Rack, or vice-versa. They cover all the traditional Cellular frequencies, including the **CBRS, C-Bands and LTE-LAA**. This module can be used in to split the input signal before going into the DAS system. It also has a very low Insertion Loss with an outstanding VSWR at all three ports. The whole module of 16 splitters comes fully assembled and tested.

- 12x 2-Way In-Line Splitter Modules on 2RU tray
- Each Splitter has independent RF Path
- In-Line Input & Output Connectors
INPUT – 4.3-10 (F)
OUTPUT – 4.3-10 (F)
- **CBRS / C-Band / LTE-LAA** Ready
- Low PIM , -161dBc
- In Stock to low lead time delivery

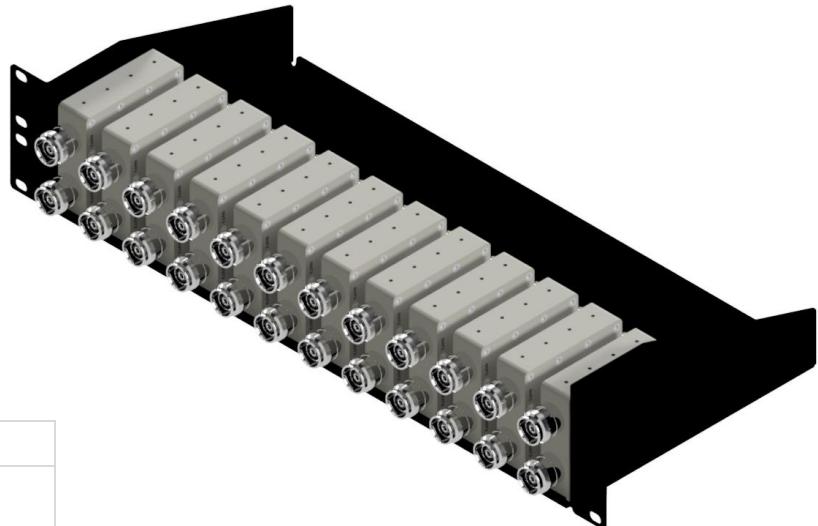


ELECTRICAL SPECIFICATIONS:

Frequency Range	600 MHz – 6000 MHz
Passband IL (Over the theoretical loss 3dB)	0.25 dB @ 600-2700 MHz 0.35 dB @ 2700-4200 MHz 0.50 dB @ 4200-6000 MHz
VSWR	≤ 1.25 @ 600-2700 MHz ≤ 1.30 @ 2700-4200 MHz ≤ 1.30 @ 4200-6000 MHz
Power Handling	300 W (Avg)
Intermodulation (PIM - 3 rd)	-163 dBc (Typ) (2 Tones +43 dBm)
Impedance	50 Ohms
Temperature Range	-30°C to 75°C

MECHANICAL SPECIFICATIONS:

Total # of Splitters	12 (Independent RF Paths)
Rack Space Needed	2 RU
Temperature Range	-30°C to 70°C
Weight	28.00 lbs
Connectors	IN – 4.3-10 (F) / OUT – 4.3-10 (F)
Dimensions	3.47"(H) x 19.00"(W) x 6.00"(D)

Dimensions for ASSM-112BR-12-D43:

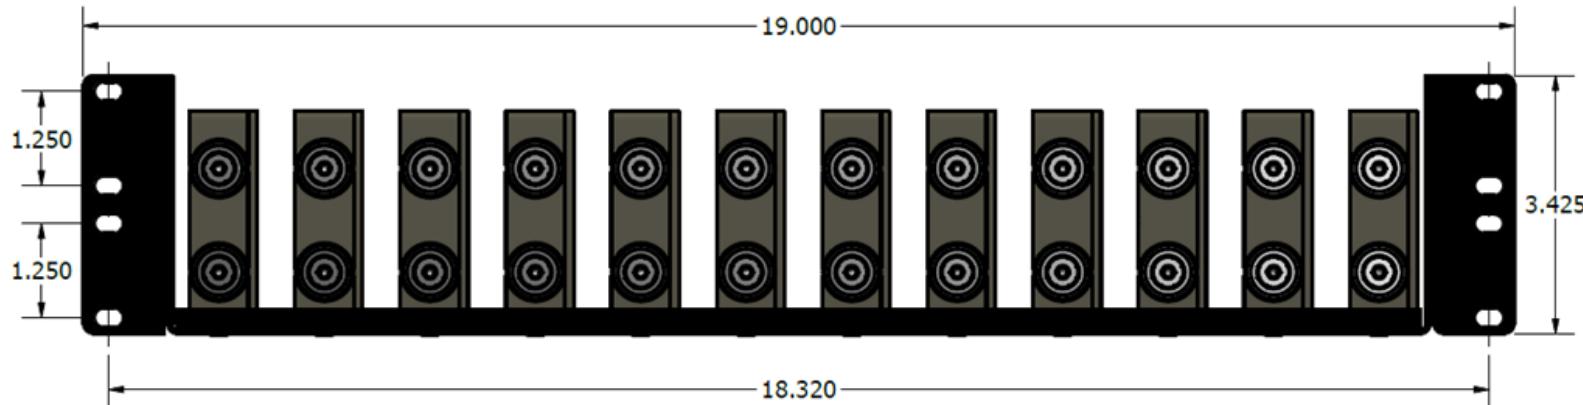

Please contact our sales department at 737-200-7090 or sales@InnowaveRF.com for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.