

2-Way Power Splitter Array Module on a 2RU 19" Rack Tray 600-6000MHz, -161dBc PIM, 2RU High, QMA Connectors

**ASSM-112R Series** is an array of 2-Way Power Splitters mounted on a 2RU Sub-Rack Tray (PN: R112B-2RU). Up to 16x of the Reactive Splitters (Model #: 112R-600-6000-QMA) can be mounted on a rack tray. Each of these splitters has an independent RF path. The Splitters have both Input and Output connectors on the same side which makes connection on a Rack Frame or H-Frame simple and straightforward. They cover all the traditional Cellular frequencies, including the CBRS, C-Bands and LTE-LAA. When mounted on a DAS Tray, they can be used to split signals coming out of Attenuator Modules into different zones in In-Building Systems. It also has a very low Insertion Loss with an outstanding VSWR at all three ports.

Each Assembly includes the following:

- 2RU Sub-Rack (PN: R112B-2RU) Holds up to 16x 2-Way Splitter Modules
- 2-Way Power Splitter with QMA Connectors (PN: 112R-600-6000-QMA)
- Up to 16x 2-Way Splitter Modules on 2RU tray
- Each Splitter has independent RF Path
- Input & Output Connectors along the same side
- INPUT QMA (F)
   OUTPUT QMA (F)
- CBRS / C-Band / LTE-LAA Ready
- Low PIM , -161dBc
- In Stock to low lead time delivery



# SPECIFICATIONS for 2-Way SPLITTER MODULE

# PN: 112R-600-6000-QMA:

Frequency Range

rrequeriey range	600 MHz - 6000 MHz
Passband Insertion Loss	0.20dB (Over the theoretical loss 3dB)
2033	(Over the theoretical loss 5db)
VSWR	≤ 1.30 @ 600-960 MHz ≤ 1.25 @ 960-4200 MHz ≤ 1.30 @ 4200-6000 MHz
Power Handling	200 W (Avg)
Intermodulation (PIM - 3 <sup>rd</sup> )	-161 dBc (Typ) (2 Tones +43 dBm)
Impedance	50 Ohms
Temperature Range	-30°C to 70°C
Connector	IN - QMA(F) / OUT - QMA(F)
Weight	0.75 lbs
Dimensions (in)	3.34"(H) x 0.91"(W) x 2.36"(D)

# SPECIFICATIONS for 2RU Sub-Rack PN: R112B-2RU:


2-Way Splitter	16 (may)
Module	16 (max)
Rack Space Needed	2 RU
Temperature Range	-30°C to 70°C
Weight	3.00 lbs
Dimensions	3.47"(H) x 19.00"(W) x 3.75"(D)

COO MILL COOO MILL



2-Way Power Splitter Array Module on a 2RU 19" Rack Tray 600-6000MHz, -161dBc PIM, 2RU High, QMA Connectors

# **Dimensions for 2-Way Power Splitter Module (PN: 112R-600-6000-QMA)**

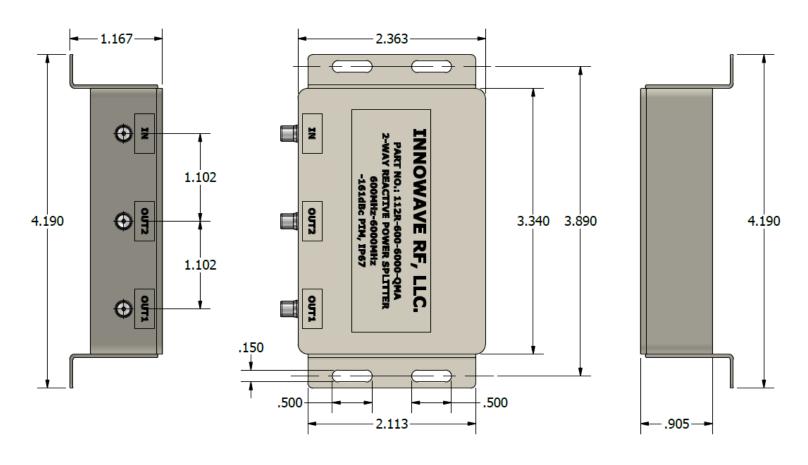








2-Way Power Splitter Array Module on a 2RU 19" Rack Tray 600-6000MHz, -161dBc PIM, 2RU High, QMA Connectors

### **Dimensions for 2RU Sub-Rack (PN: R112B-2RU)**

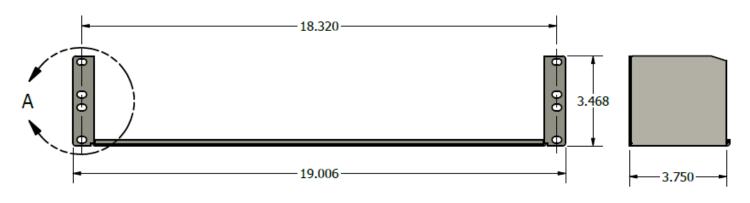



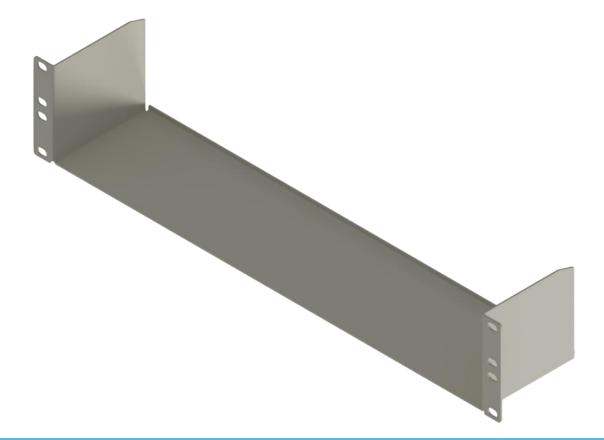

2-Way Power Splitter Array Module on a 2RU 19" Rack Tray 600-6000MHz, -161dBc PIM, 2RU High, QMA Connectors

### ASSM-112R-16-QMA with 16x 2-Way Power Splitters



#### ASSM-112R-16-QMA with 10x 2-Way Power Splitters



Please contact our sales department at 737-200-7090 or <a href="mailto:sales@InnowaveRF.com">sales@InnowaveRF.com</a> for any custom requirements. © Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.