


FEATURES:

- Splits or combines the **Uplink (RX)** (788MHz-805MHz) and **Downlink (TX)** (758MHz-775MHz) frequencies within the **700 MHz Public Safety Band**
- Best-in-class Isolation between the 2 signals
- Very low Insertion Loss with superior out of band rejections
- Available in 4.3-10 and Type-N Connectors Standard
- Ease of Mounting with mounting holes
- RoHS Compliant
- In Stock and Available Immediately

Block Diagram for 921-769-799



ELECTRICAL SPECIFICATIONS:

Frequency Bands	Downlink Freq (TX) 758MHz - 775MHz	Uplink Freq (RX) 788MHz - 805MHz
Passband Insertion Loss	0.50 dB	
Isolation	65dB	
Return Loss	20 dB	
Impedance	50 Ohms	
Lightning Protection	8/20S 10kA Pulse (IEC 801-5) (Available on Request)	
Input Power /Port	100 Watts (Avg)	
Intermodulation (PIM - 3 rd)	-157 dBc (2 Tones +43 dBm)	
MTBF Hours	≥ 500,000	


MECHANICAL SPECIFICATIONS:

Connectors:	4.3-10 / Type-N (Standard)
Housing Finish:	Aluminum Body
Mounting Method:	Mounting Bracket
Temperature Range:	-35°C to 75°C
Weight:	3.00 lbs
Relative Humidity:	5% - 95%
Environment:	IP65

ORDERING INFO:

Type-N Connector:	Part#: 921-769-799-N
4.3-10 Connector:	Part#: 921-769-799-D43

Dimensions for 921-769-799-N

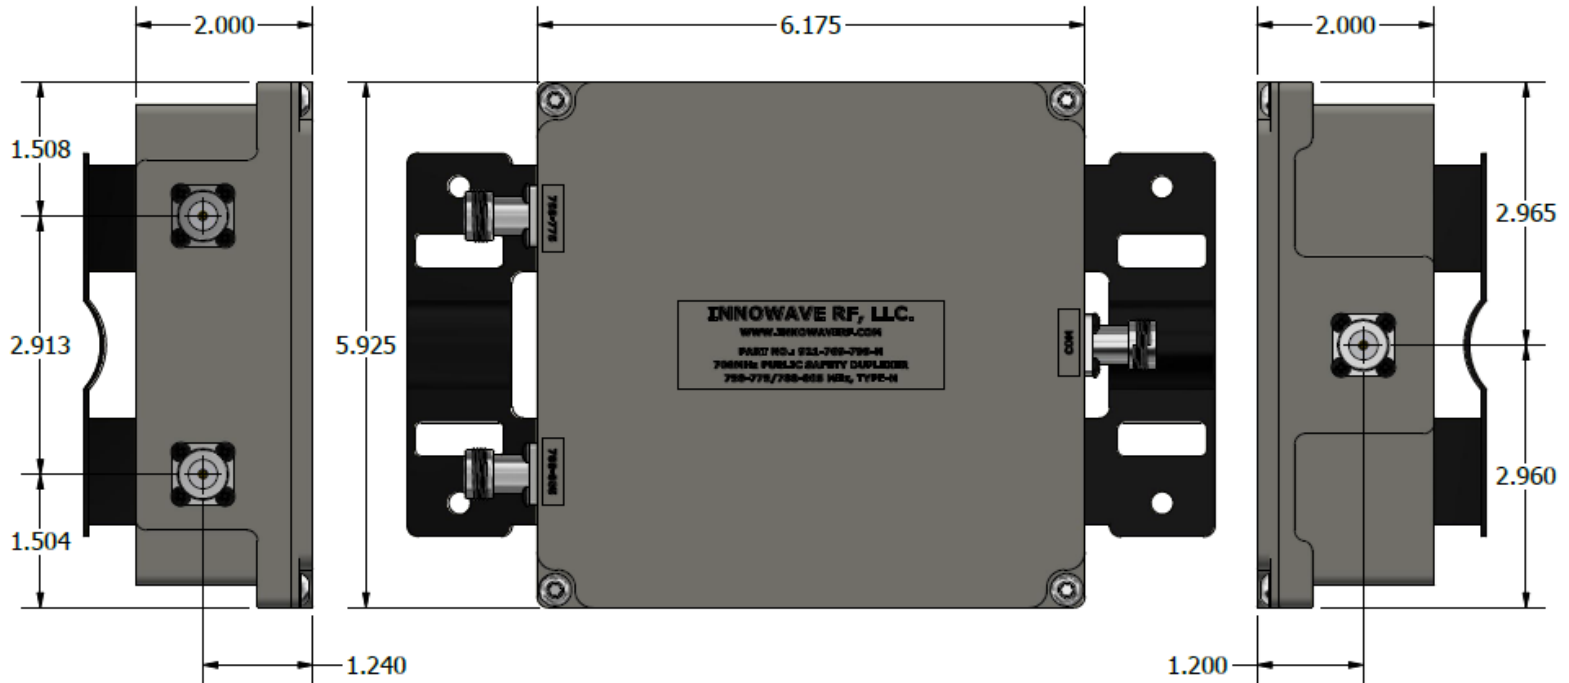

Please contact our sales department at 737-200-7090 or sales@InnowaveRF.com for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.