


### FEATURES:

- Splits or combines the **Uplink (RX)** (788MHz-805MHz) and **Downlink (TX)** (758MHz-775MHz) frequencies within the **700 MHz Public Safety (Band 14) Band**
- Best-in-class Isolation between the 2 signals
- Very low Insertion Loss with superior out of band rejections
- Available in 4.3-10 or Type-N Connectors
- Ease of Mounting with mounting holes and brackets
- Low-PIM with High Power Handling
- RoHS Compliant
- Weatherproof for Outdoor Models available
- In Stock and Available Immediately

### Block Diagram for 921-763-793



### ELECTRICAL SPECIFICATIONS:

| Frequency Bands                          | Downlink Freq (TX)<br>758MHz - 775MHz               | Uplink Freq (RX)<br>788MHz - 805MHz |
|--|---|-------------------------------------|
| Passband Insertion Loss                  | 0.30 dB   |                                     |
| Isolation                                | 65dB<br>@ 788MHz - 805MHz                           | 65dB<br>@ 758MHz - 775MHz           |
| Return Loss                              | 20 dB   |                                     |
| Impedance                                | 50 Ohms   |                                     |
| Lightning Protection                     | 8/20S 10kA Pulse (IEC 801-5) (Available on Request) |                                     |
| Input Power /Port                        | 100 Watts (Avg)                                     |                                     |
| Intermodulation (PIM - 3 <sup>rd</sup> ) | -161 dBc (2 Tones +43 dBm)                          |                                     |
| MTBF Hours                               | ≥ 500,000   |                                     |


### MECHANICAL SPECIFICATIONS:

|                    |                           |
|--------------------|---------------------------|
| Connectors:        | 4.3-10 (D43) / Type-N (N) |
| Housing Finish:    | Aluminum Body             |
| Mounting Method:   | Mounting Bracket          |
| Temperature Range: | -35°C to 75°C             |
| Weight:            | 3.00 lbs                  |
| Relative Humidity: | 5% - 95%                  |
| Environment:       | IP65                      |

### ORDERING INFO:

|                   |                        |
|-------------------|------------------------|
| 4.3-10 Connector: | Part#: 921-763-793-D43 |
| Type-N Connector: | Part#: 921-763-793-N   |

**Dimensions for 921-763-793-N**

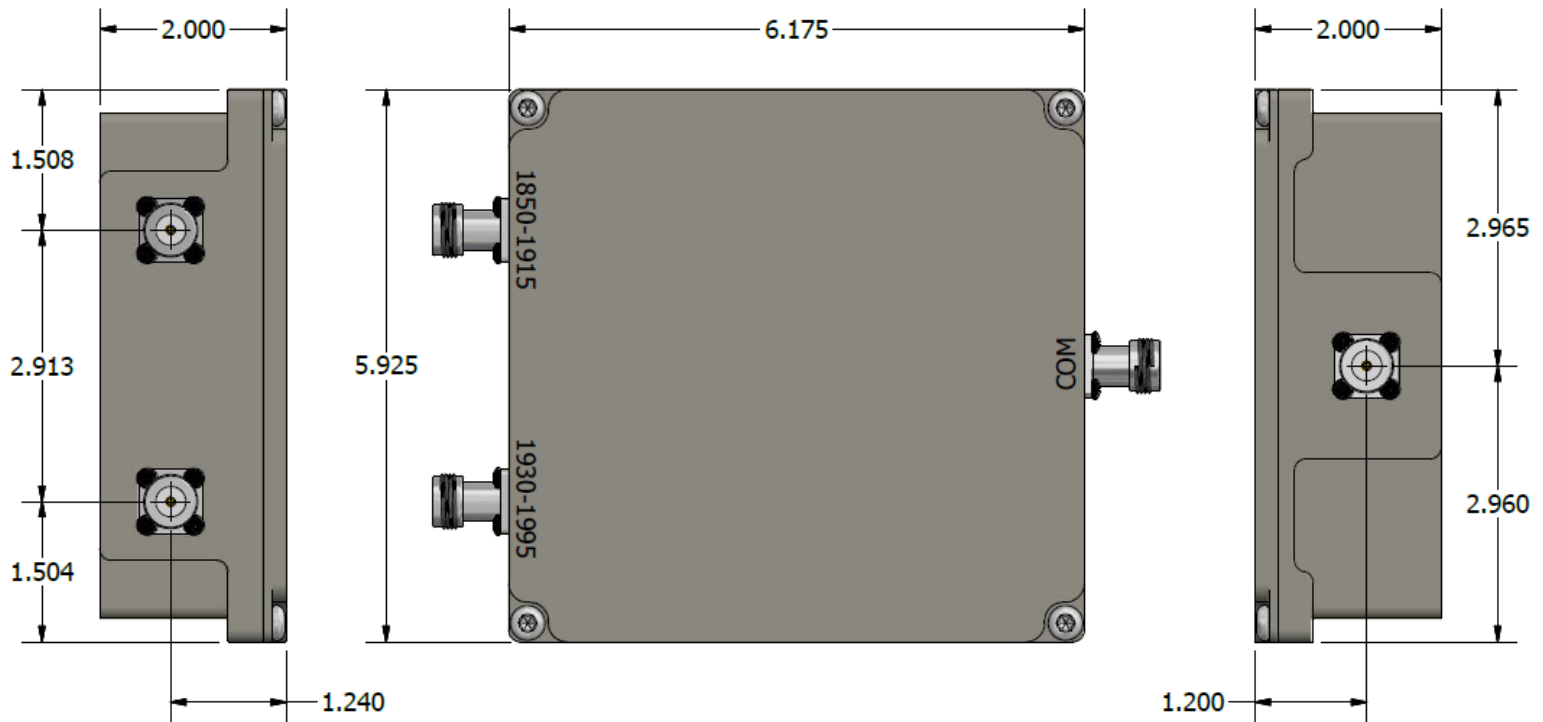

Please contact our sales department at 737-200-7090 or [sales@InnowaveRF.com](mailto:sales@InnowaveRF.com) for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.