
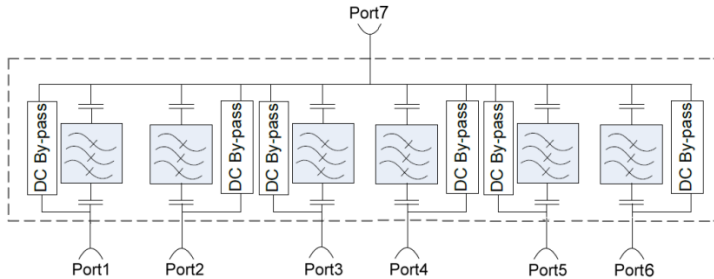


FEATURES:

- Splits or combines **600(B71), 700+FN Bands** (617MHz-798MHz), **850 Band** (815MHz-896MHz), **PCS Band** (1850MHz-2000MHz), **AWS-1, AWS-3 Bands** (1695MHz-1780MHz & 2110MHz-2200MHz), **BRS Band** (2496MHz-2690MHz) and **DoD, CBRS, C-Band** (3300-4200)
- Minimum 40dB Isolation between the bands
- Very low Insertion Loss with superior out of band rejections
- Available in 4.3-10 or NEX10 Connectors
- Ease of Mounting with mounting holes and brackets
- Low-PIM with High Power Handling
- RoHS Compliant
- Weatherproof for Outdoor installation
- In Stock and Available Immediately

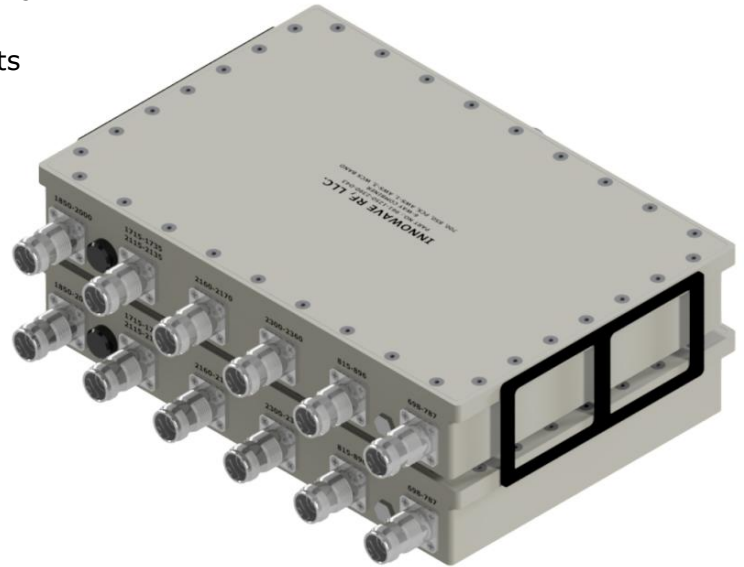

ELECTRICAL SPECIFICATIONS:

Frequency Bands	600, 700+FN	850	PCS	AWS1,AWS3	BRS	CBRS,C-Band
	617-798	815-896	1850-2000	1695-1780 2110-2200	2496-2690	3300-4200
Passband Insertion Loss	0.45 dB					
Isolation	≥ 40 dB					
Return Loss	21 dB					
Impedance	50 Ohms					
Input Power /Port	150 Watts (Avg)					
DC Pass Current	4000 mA (Typ) <i>(DC Block Available on Request)</i>					
Intermodulation (PIM-3 rd)	-161dBc (2 Tones +43 dBm)					
Lightning Protection	8/20S 10KA Pulse (IEC801-5)					
MTBF Hours	≥ 500,000					

MECHANICAL SPECIFICATIONS:

- Connectors: 4.3-10 (D43) / NEX10 (X10)
- Housing Finish: Aluminum Body
- Mounting Method: Mounting Bracket
- Temperature Range: -30°C to 75°C
- Weight: 12.5 lbs
- Relative Humidity: 5% - 95%
- Environment: IP67


ORDERING INFO:

Stacked Model:

- 4.3-10 Connector: Part#: 962C-1300-3390-D43
- NEX10 Connector: Part#: 962C-1300-3390-X10

SINGLE MODEL AVAILABLE

Dimensions for 962C-1300-3390-D43

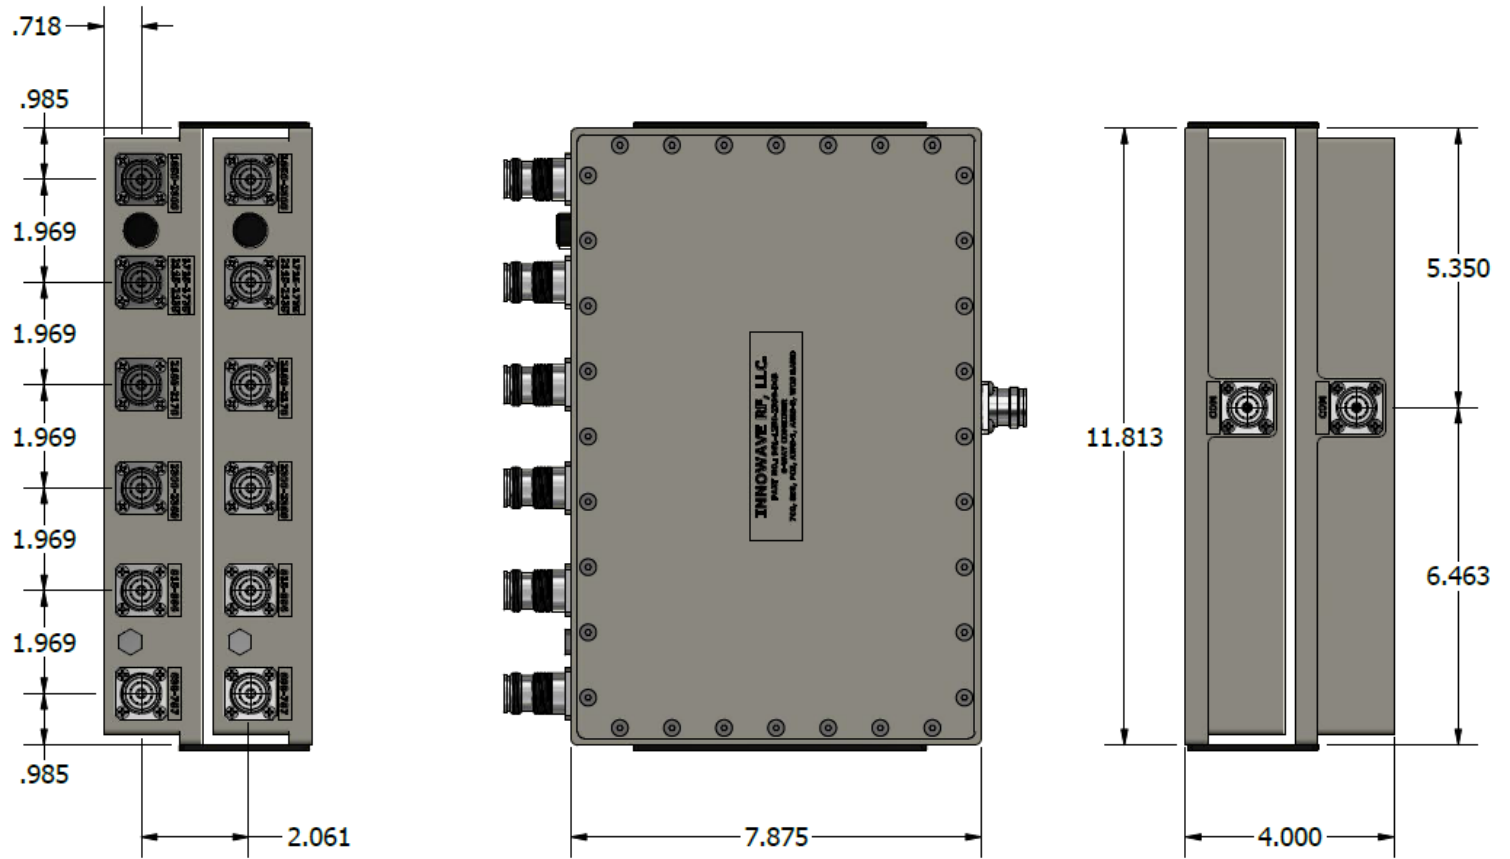

Please contact our sales department at 737-200-7090 or sales@InnowaveRF.com for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.