
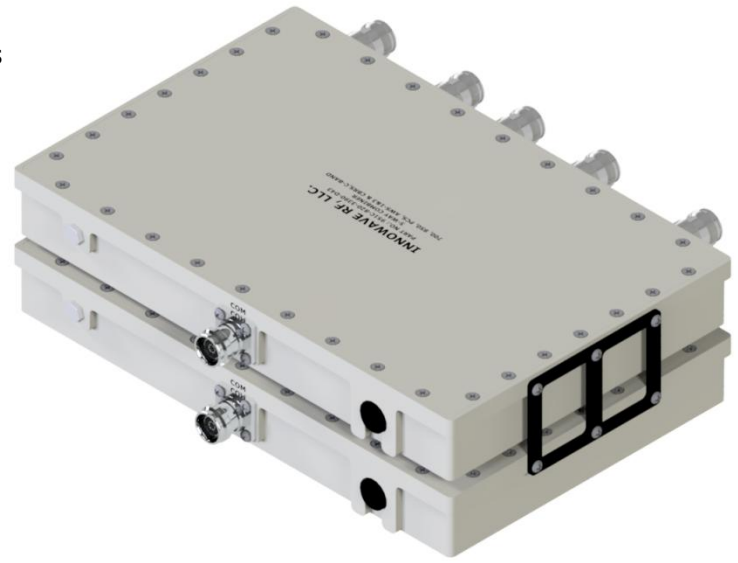


FEATURES:

- Splits or combines **600(B71), 700+FN** (617MHz-798MHz), **850 Bands** (815MHz-896MHz), **PCS Band** (1850MHz-2000MHz), **AWS-1, AWS-3 Bands** (1695MHz-1780MHz & 2110MHz-2200MHz) and **DoD, CBRs, C-Band** (3300MHz-4200MHz)
- Minimum 40dB Isolation between the bands
- Very low Insertion Loss with superior out of band rejections
- Available in 4.3-10 or NEX10 Connectors
- Ease of Mounting with mounting holes and brackets
- Low-PIM with High Power Handling
- RoHS Compliant
- Weatherproof for Outdoor installation
- In Stock and Available Immediately

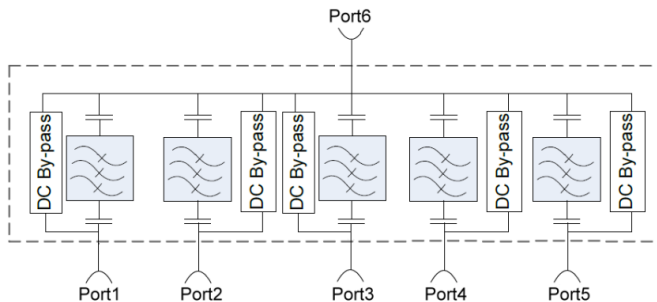

ELECTRICAL SPECIFICATIONS:

Frequency Bands	600, 700+FN 617 - 798 MHz	850 815 - 896 MHz	PCS 1850 - 2000 MHz	AWS-1, AWS-3 1695 - 1780 MHz 2110 - 2200 MHz	CBRS, C-Band 3300 - 4200 MHz
Passband Insertion Loss	0.40 dB				
Isolation	≥ 40 dB				
Return Loss	21 dB				
Impedance	50 Ohms				
Input Power	250 Watts (Avg); 2500 Watts (Peak)				
DC Pass Current	4000 mA (Typ) (DC Block Available on Request)				
Intermodulation (PIM-3 rd)	-161dBc (2 Tones +43 dBm)				
Lightning Protection	8/20S 10KA Pulse (IEC801-5)				
MTBF Hours	≥ 500,000				

MECHANICAL SPECIFICATIONS:

Connectors:	4.3-10 (D43) / NEX10 (X10)
Housing Finish:	Aluminum Body
Mounting Method:	Mounting Bracket
Weight:	12.00 lbs
Temperature Range:	-30°C to 75°C
Relative Humidity:	5% - 95%
Environment:	IP67


ORDERING INFO:

Stacked Model:

4.3-10 Connector:	Part#: 952C-820-3390-D43
NEX10 Connector:	Part#: 952C-820-3390-X10

SINGLE MODEL AVAILABLE

Dimensions for 952C-820-3390-D43

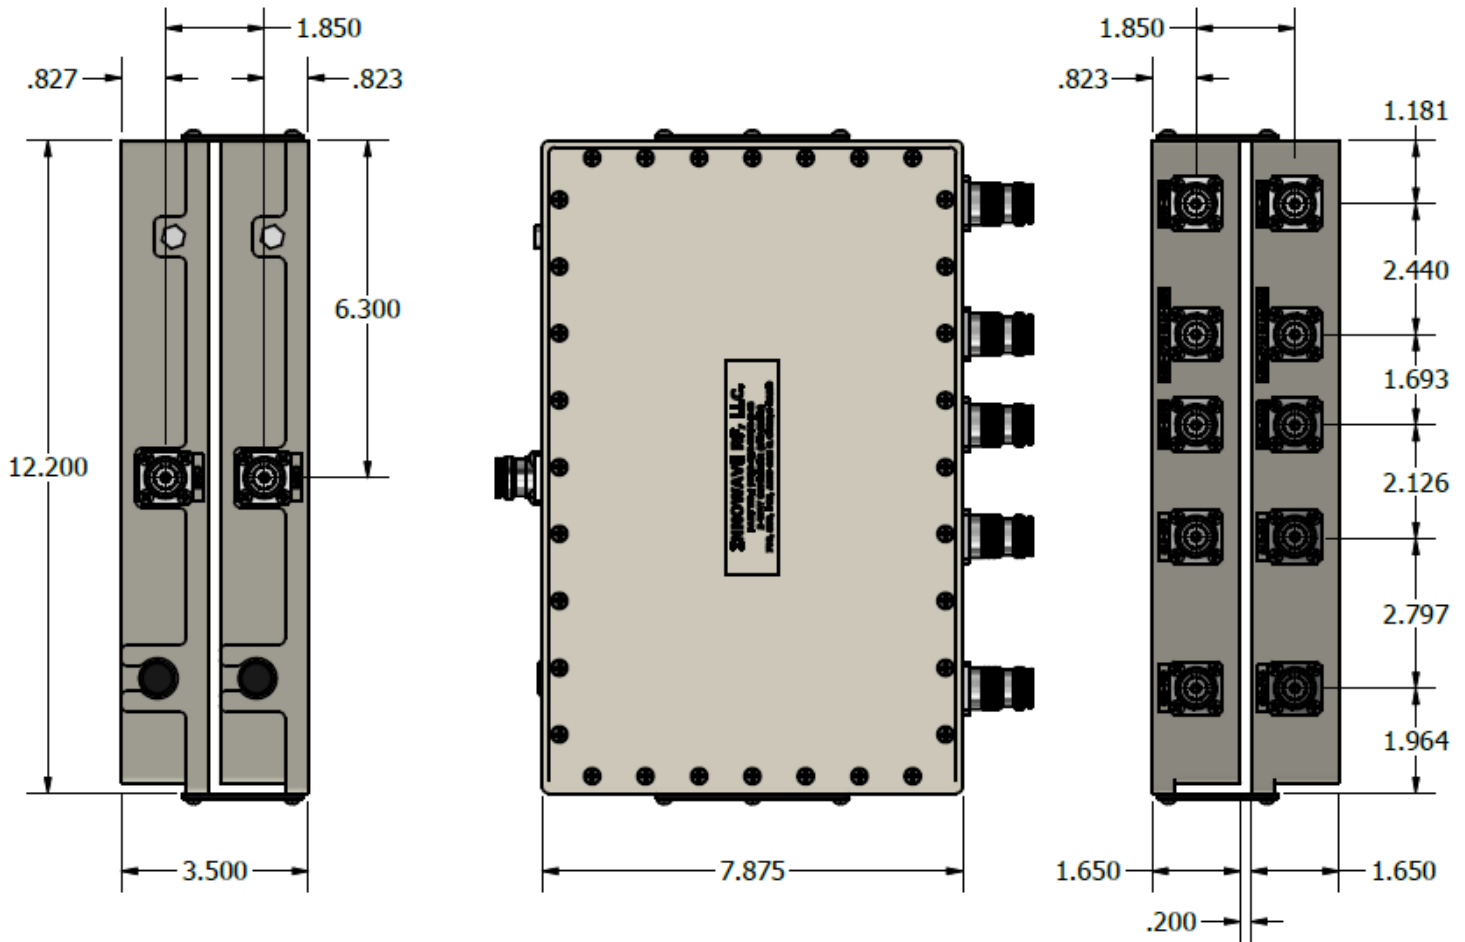

Please contact our sales department at 737-200-7090 or sales@InnowaveRF.com for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.