

**Innovation in Every Wave**

**114-600-6000** is a Low-PIM 4-Way Wideband Reactive Power Splitter, designed to evenly split high power signals between 600MHz and 6000MHz. These splitters cover all the traditional Cellular frequencies, including the CBRS and LTE-LAA Bands. Because of their rugged construction, they are indestructible and can be used in extreme weather and environmental conditions. It also has a very low Insertion Loss with an outstanding VSWR at all three ports. Available with different connector options.

**FEATURES:**


- Wide bandwidth 600 MHz – 6000 MHz
- Covers **CBRS, C-Band and LTE-LAA** Bands
- Low Insertion Loss and low VSWR
- Low PIM, -163dBc
- *RoHS* Complaint
- Weatherproof / Outdoor unit
- In Stock to low lead time delivery
- Superior Construction and High Power Handling
- Available in 4.3-10 or Nex10 Connectors



**SPECIFICATIONS:**

Frequency Range:	600 MHz – 6000 MHz
Passband Insertion Loss:	0.30 dB @ 600-2700 MHz 0.40 dB @ 2700-4200 MHz 0.55 dB @ 4200-6000 MHz (Over the theoretical loss of 6 dB)
VSWR:	≤ 1.30 @ 600-4200 MHz ≤ 1.35 @ 4200-6000 MHz
Power Handling:	300 W (Avg)
Impedance:	50Ω
PIM – 3 <sup>rd</sup> :	-163 dBc (2 Tones +43 dBm)
Temperature Range:	-30°C to 75°C
Weight:	0.85 lb
Housing Finish:	Aluminum Body
Mounting Method:	Mounting Holes
Humidity:	5% - 95%
Environment:	IP67


**Block Diagram for 114-600-6000**

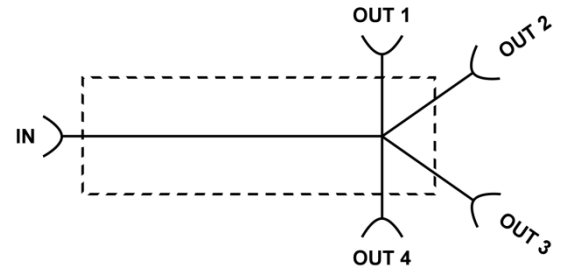

**ORDERING INFO:**

114-600-6000-D43	--- 4.3-10 Connector
114-600-6000-X10	--- Nex10 Connector

**Dimensions for 114-600-6000**

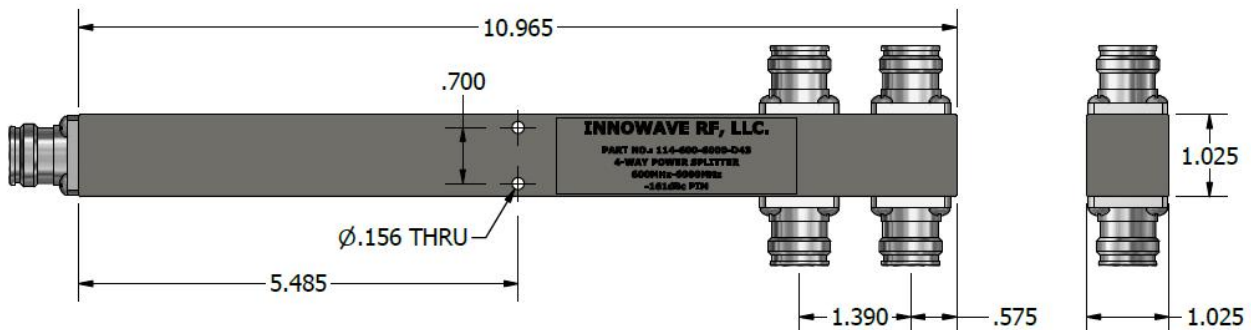

Please contact our sales department at 737-200-7090 or [sales@InnowaveRF.com](mailto:sales@InnowaveRF.com) for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.