


FEATURES:

- Splits or combines the **600 (B71), 700, 850, PCS, AWS-1&3 Bands** (617MHz-2200MHz) and **WCS,BRS Bands** (2300MHz-2690MHz), **CBRS, C-Band** (3300MHz-4200MHz)
- Available in **Dual / Stacked Model (932C Series)**
- Minimum 40dB Isolation between the bands
- Very low Insertion Loss with superior out of band rejections
- Available in 4.3-10 or NEX10 Connectors
- Ease of Mounting with mounting holes and brackets
- Low-PIM with High Power Handling
- RoHS Compliant
- Weatherproof for Outdoor installation
- In Stock and Available Immediately

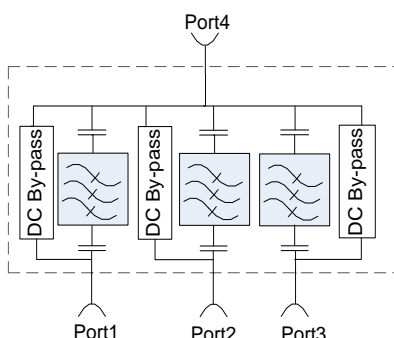

ELECTRICAL SPECIFICATIONS:

Frequency Bands	600, 700, 850, PCS, AWS 617MHz - 2200MHz	WCS, BRS 2300MHz - 2690MHz	CBRS, C-Band 3300MHz - 4200MHz
Passband Insertion Loss		0.25 dB (Typ)	
Isolation		≥ 40 dB (Typ)	
Return Loss		21 dB (Typ)	
Impedance		50 Ohms	
Input Power / Port		150 Watts (Avg)	
Intermodulation (PIM - 3 rd)		-161dBc (Min) (2 Tones +43 dBm)	
DC Pass Current		4000 mA (Typ) (DC Block Available on Request)	
Lightning Protection		8/20S 10kA Pulse (IEC801-5)	
MTBF Hours		≥ 500,000	

MECHANICAL SPECIFICATIONS:

Connectors:	4.3-10 (D43) / NEX10 (X10)
Housing Finish:	Aluminum Body
Mounting Method:	Mounting Bracket
Temperature Range:	-30°C to 75°C
Humidity:	5% – 95%
Weight:	4.00 lbs
Environment:	IP67


ORDERING INFO:

Single Model:

4.3-10 Connector:	Part#: 931C-1500-3390-D43
NEX10 Connector:	Part#: 931C-1500-3390-X10

STACKED MODEL AVAILABLE

Dimensions for 931C-1500-3390-D43

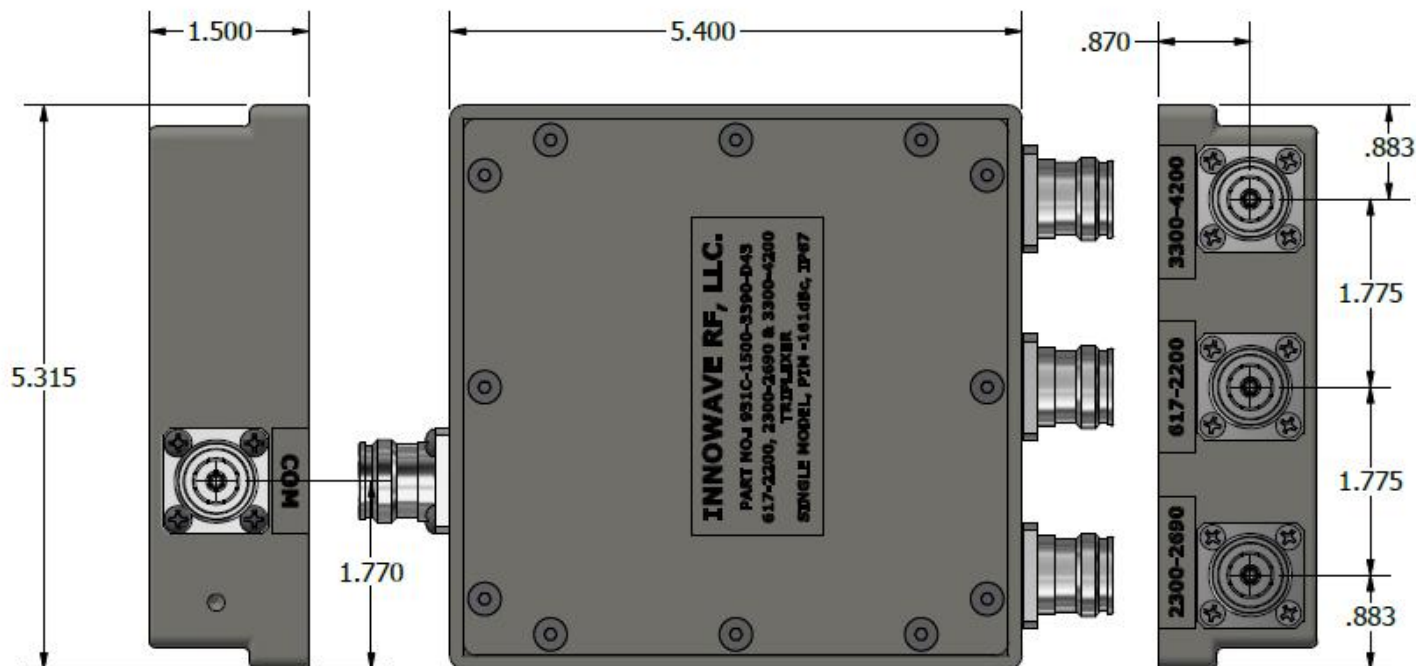

DUAL/STACKED UNITS AVAILABLE (932C SERIES)

Please contact our sales department at 737-200-7090 or sales@InnowaveRF.com for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.